
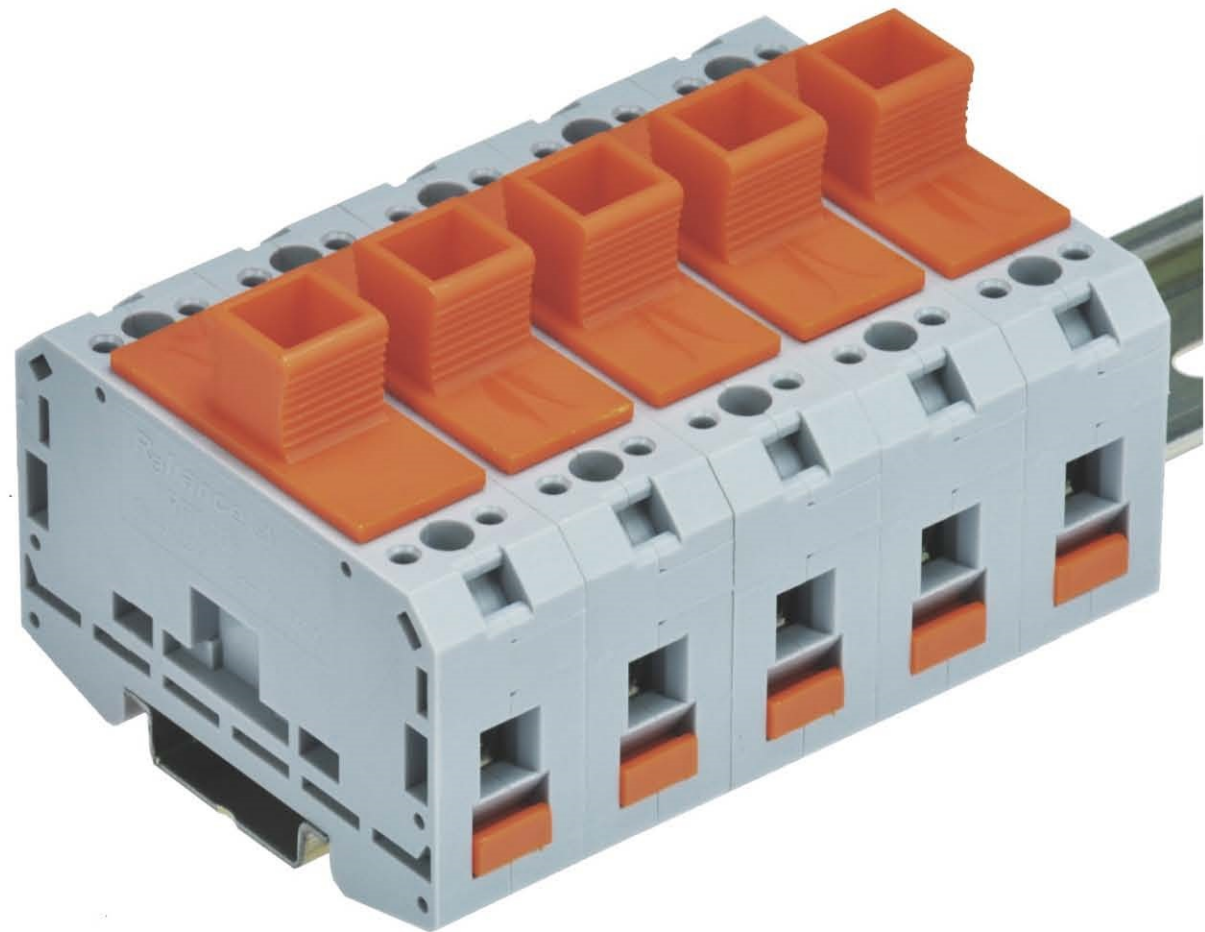




RFT SERIES
FUSE TERMINAL BLOCKS



RFT SERIES FUSE TERMINAL BLOCKS

															
RFT 10F熔断器型				RFT 10FLD带指示灯熔断器型				RFT16F 熔断器型				RFT16FLD 带指示灯熔断器型			
外形尺寸															
宽度/厚度/高度 (mm)				72/20/61				82/17.8/65.7				82/17.8/65.7			
剥线长度mm/螺钉/拧紧扭矩				12/M4/(1.5-1.8)				12/M4/(1.5-1.8)				12/M4/(1.5-1.8)			
额定数据															
额定电压/ 额定电流/额定截面				380V/20A*/10mm²				1000V/32A*				—/32A*			
额定冲击耐压/污染等级				4kV/3				8kV/3				8kV/3			
夹紧导线范围(mm²)															
单股导线				1.5.....10				1.5.....25				1.5.....25			
多股导线				2.5.....10				2.5.....25				2.5.....25			
多股导线(带管状端头)				1.5.....10				1.5.....16				1.5.....16			
订购数据															
				颜色	型号	包装	订货号	颜色	型号	包装	订货号	颜色	型号	包装	订货号
				灰色	RFT10F GY	10	811228	灰色	RFT10FLD (15V~30V) GY	10	811229	灰色	RFT16F GY	10	811370
				米色	RFT10F BG	10	811248	米色	RFT10FLD (110V~220V) GY	10	811239	米色	RFT16FLD(24V) GY	10	811371
				米黄色	RFT10F CC	10	811268	米黄色	RFT10FLD (15V~30V) BG	10	811249	米黄色	RFT16FLD(220V) GY	10	811372
									RFT10FLD (110V~220V) BG	10	811259		RFT16FLD(1000V) GY	10	811373
									RFT10FLD (15V~30V) CC	10	811269				
									RFT10FLD (110V~220V) CC	10	811279				
固定器															
				RF1 厚度12mm 适用于RTR35×15安装轨	RF1	50	810089	RF1	RF1	50	810089				
熔芯															
				GFA10.3×38(690VAC)				GFA10.3×38(690VAC)				GFA10.3×38(690VAC)			
												GFA10.3×38(1000VDC)			
螺丝刀															
				1.0×5.5				1.0×5.5				1.0×5.5			
标记号				尺寸(厚度X宽度)											
				空白				TM8/6N				TM8/6N			
				横向印字				TM8/6NH				TM8/6NH			
				竖向印字				TM8/6NV				TM8/6NV			

注：带指示灯的熔断器端子，熔芯熔断后其后续电路仍有电流，接直流时RFT10FLD请注意二极管的正负极性，而RFT16FLD则不分正负极。